

Technical data STC-IHH

Push/pull clamp with horizontal base plate



Simply better.



Order-No.	Opening	Automatic adjustment	Clamping force		
	mm	mm	appr. N	kg	qty.
STC-IHH15	25	8	1,100	0.19	6
STC-IHH25	35	13	2,500	0.45	6

- Moving the handle moves the push-pull rod
- Automatic and infinitely variable adjustment of the clamping height up to 13 mm while clamping force remains unchanged – without having to make manual changes to the position of the pressure screws
- Adjustable clamping force up to 2,500 N, based on the adjusting screw in the joint
- Sturdy, tempered metal sheets for a long service life
- Base plate hole pattern suitable for millimetres and inches
- High-quality oil resistant two-component plastic handle

3D CAD data for download at <http://bessey.partcommunity.com> and/or www.bessey.de

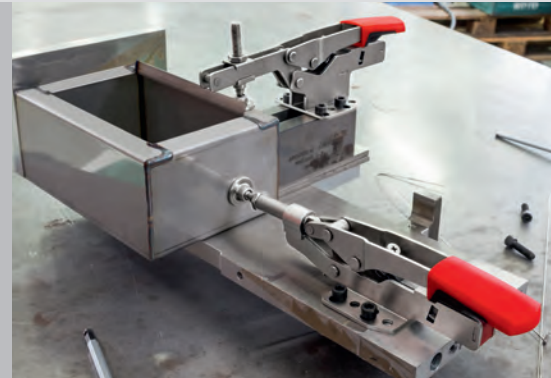


Table of dimensions

		L1	L2	L3	L4	L5	L6	L7	L8	L9	H1	H2	H3	H4	H5	H6	B1	B2	B3	B4	Lo1	Lo2	Lo3	Lo4	Ø
STC-IHH15	mm	181	–	–	16	105	45	35	46	–	32	107	–	–	13	16	8.5	–	20	42	26	13	28	26-31.75	5.5
	"	7.13	–	–	0.63	4.13	1.77	1.38	1.81	–	1.26	4.21	–	–	0.51	0.63	0.33	–	0.79	1.65	1.02	0.51	1.10	1.02-1.25	0.22
STC-IHH25	mm	233	–	–	23	154	53	38	73	–	46	155	–	–	25	27	12	–	32	60	25.4	25.4	38	33-48	6.5
	"	9.17	–	–	0.91	6.06	2.09	1.50	2.87	–	1.81	6.10	–	–	0.98	1.06	0.47	–	1.26	2.36	1.00	1.00	1.50	1.30-1.89	0.26

